


*LINEAR LIGHT LINE*

# **LUXYLED EVO OMNIA RGBW**


---



CABLE EXIT

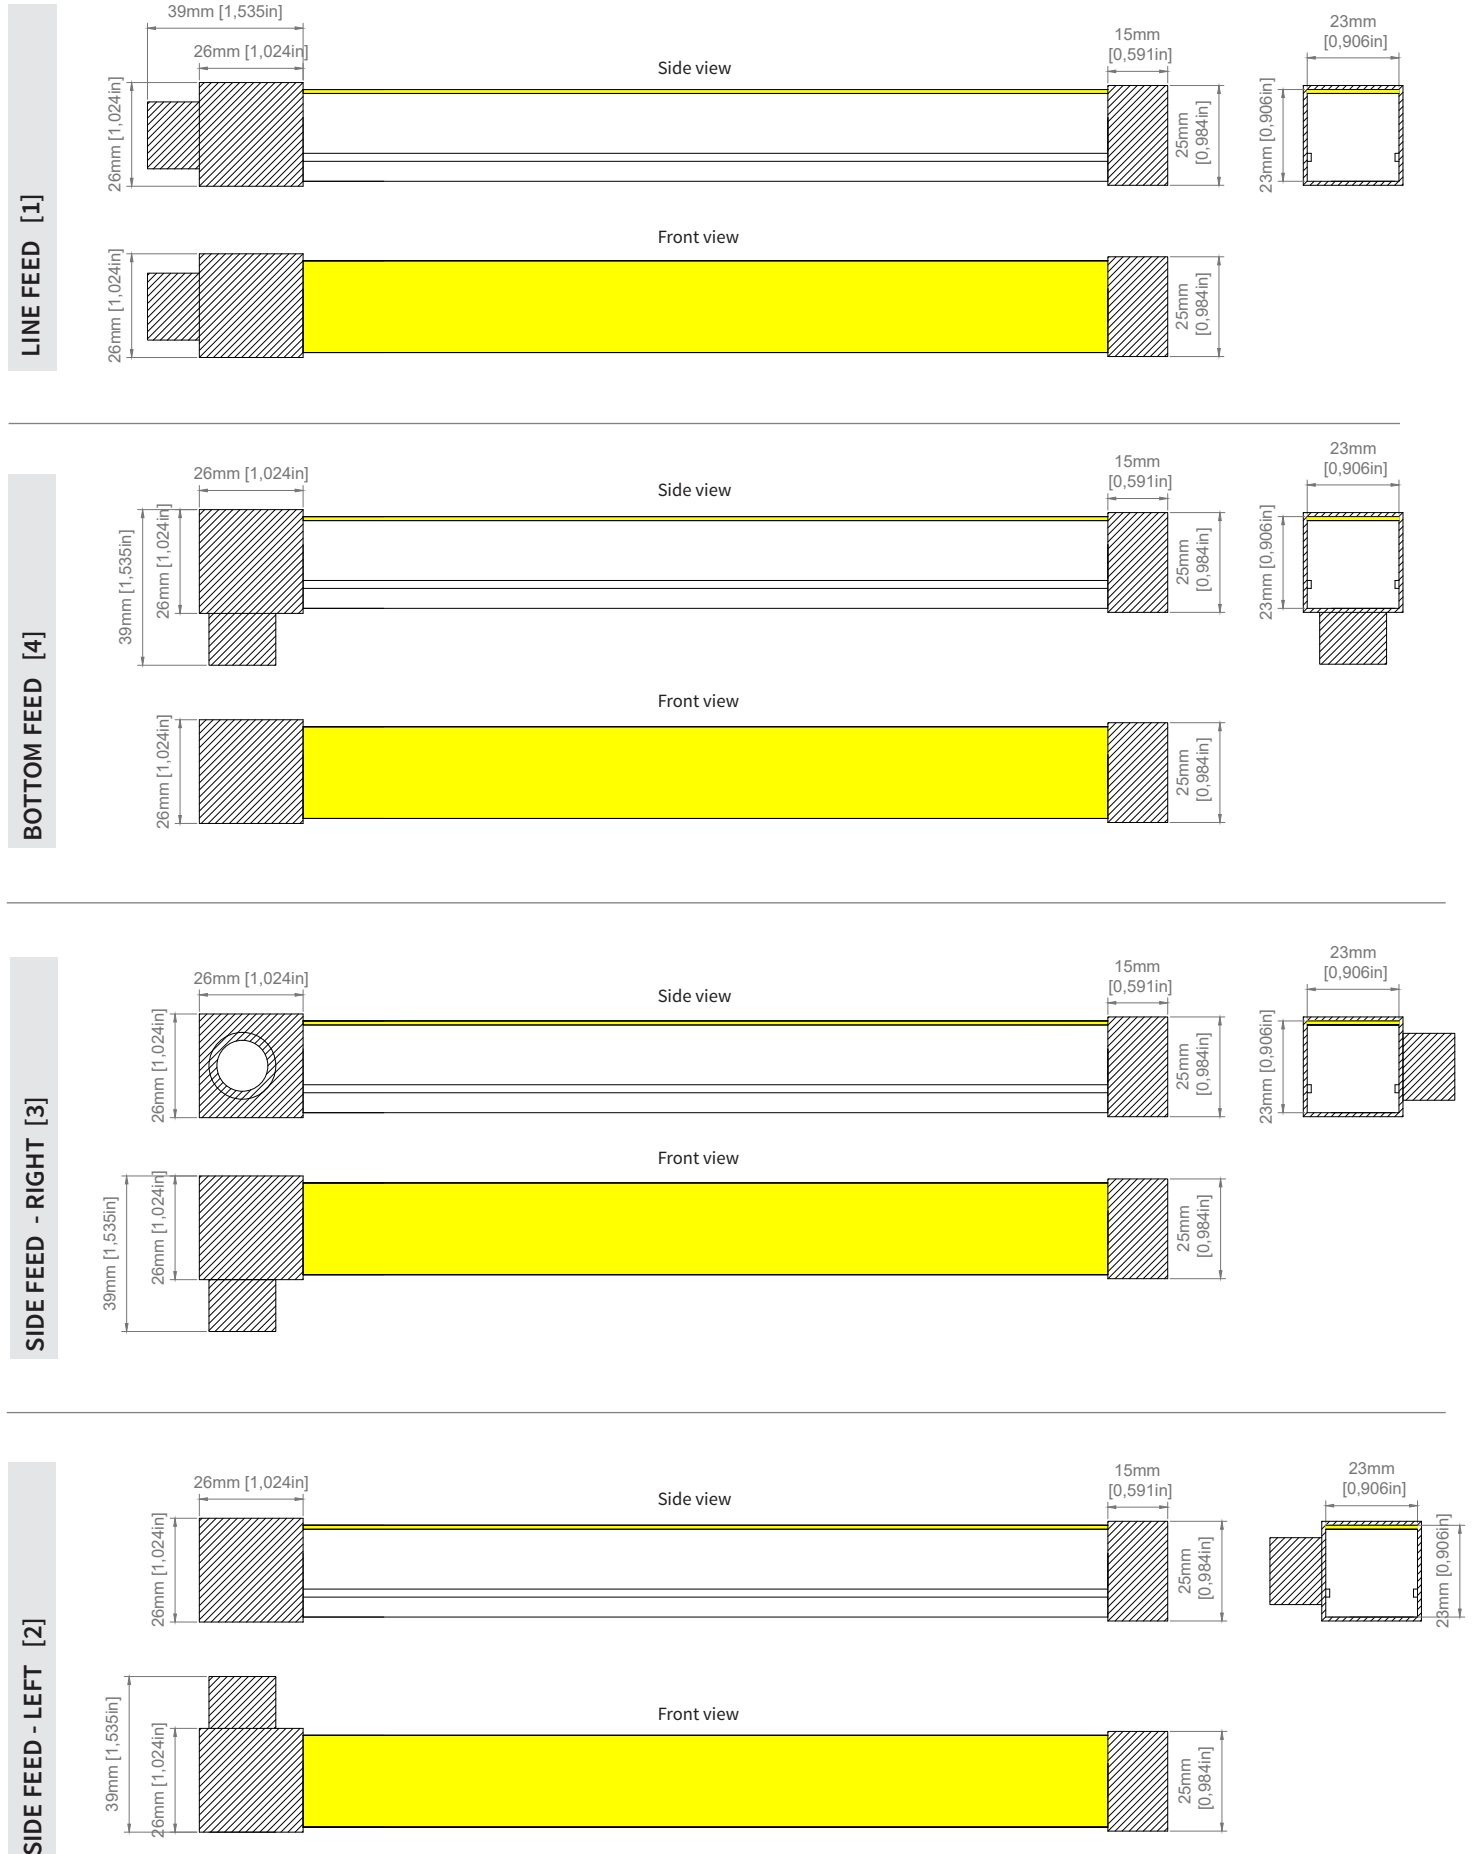

CABLE EXIT OPTIONS

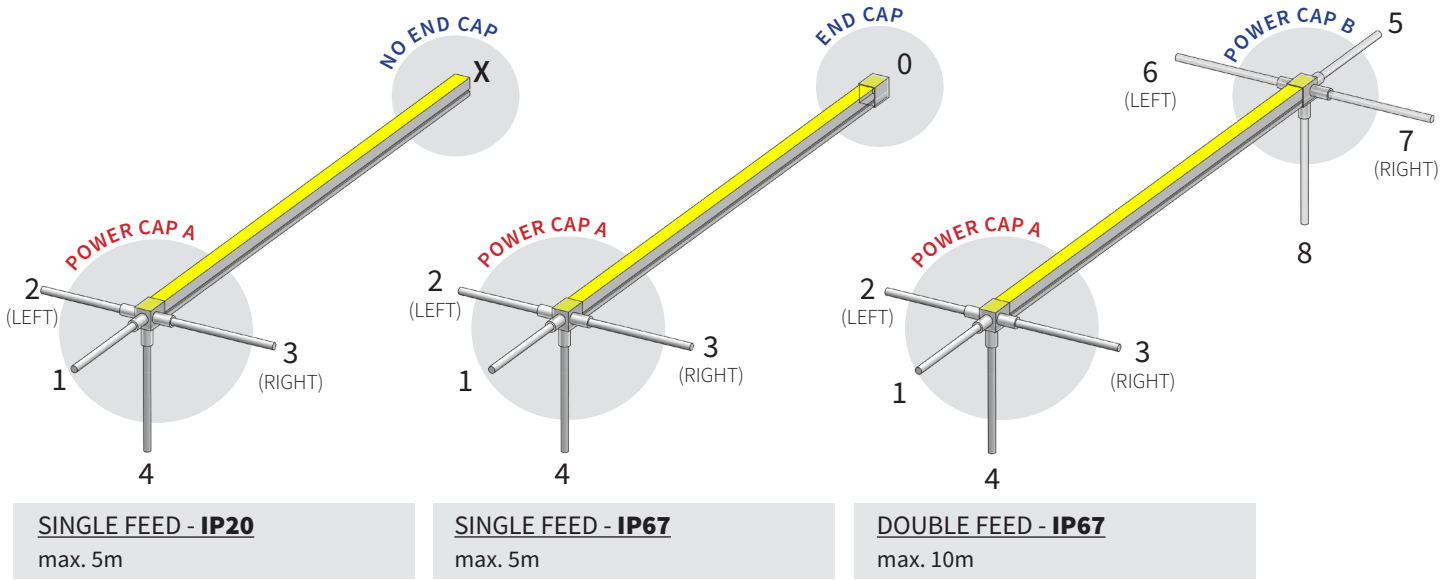

**POWER CAP A**

- 1 - LINE FEED
- 2 - SIDE LEFT FEED
- 3 - SIDE RIGHT FEED
- 4 - BOTTOM FEED


**POWER CAP B / END CAP**

- X - NO END CAP (IP20)
- 0 - END CAP (single feed)
- 5 - LINE FEED
- 6 - SIDE LEFT FEED
- 7 - SIDE RIGHT FEED
- 8 - BOTTOM FEED

BENDING RULES


LUXYLED EVO OMNIA RGBW - MULTIBENDING

MINIMUM BENDING RADIUS / SIDE BEND  $r > 150\text{mm}$  [5,9in]

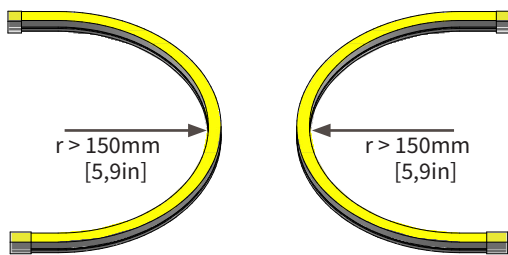

CAN BE TOP BEND

MINIMUM BENDING RADIUS / TOP BEND  $r > 150\text{mm}$  [5,9in]








CAN BE SIDE BEND



MAX. TWIST ANGLE IS 360°/m




ZERO GAP

IP67 OUTDOOR APPLICATION - CAPS

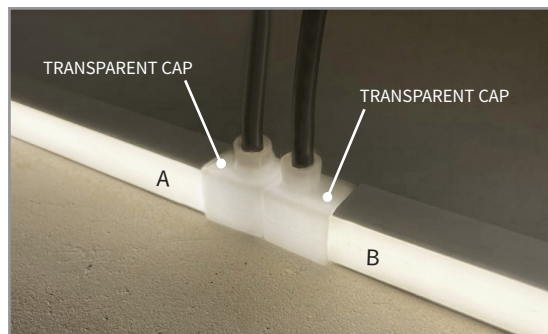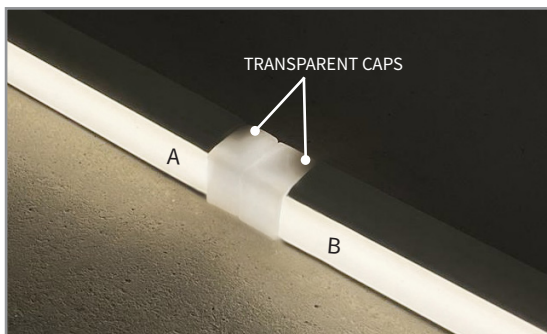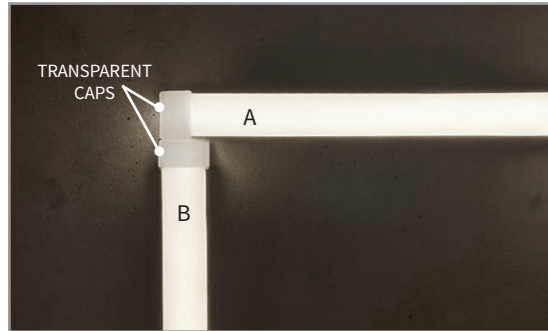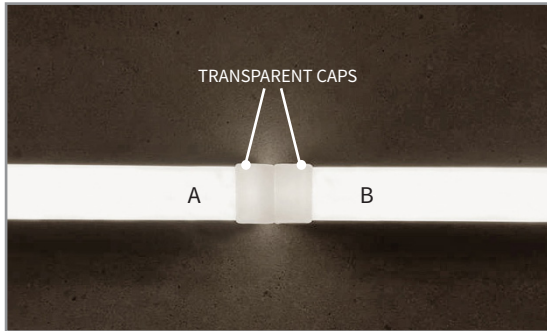


Transparent caps for a “zero gap” joint during extra long installations.

IP20 INDOOR APPLICATION - NO CAPS

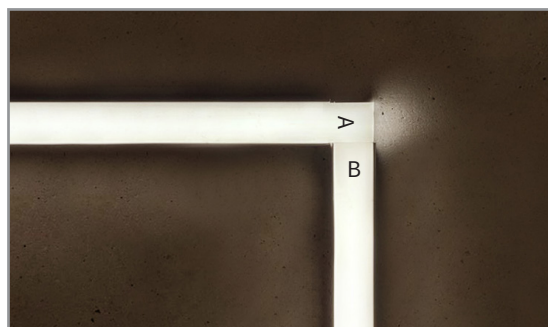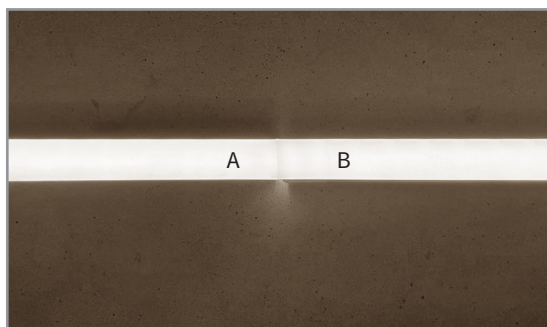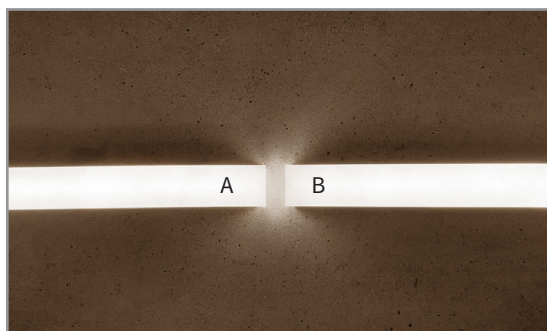

The light shines completely from the top till the end, even if you cut it. That's the reason why any joint, linear or 90° will look continuous.



FIXING ACCESSORIES

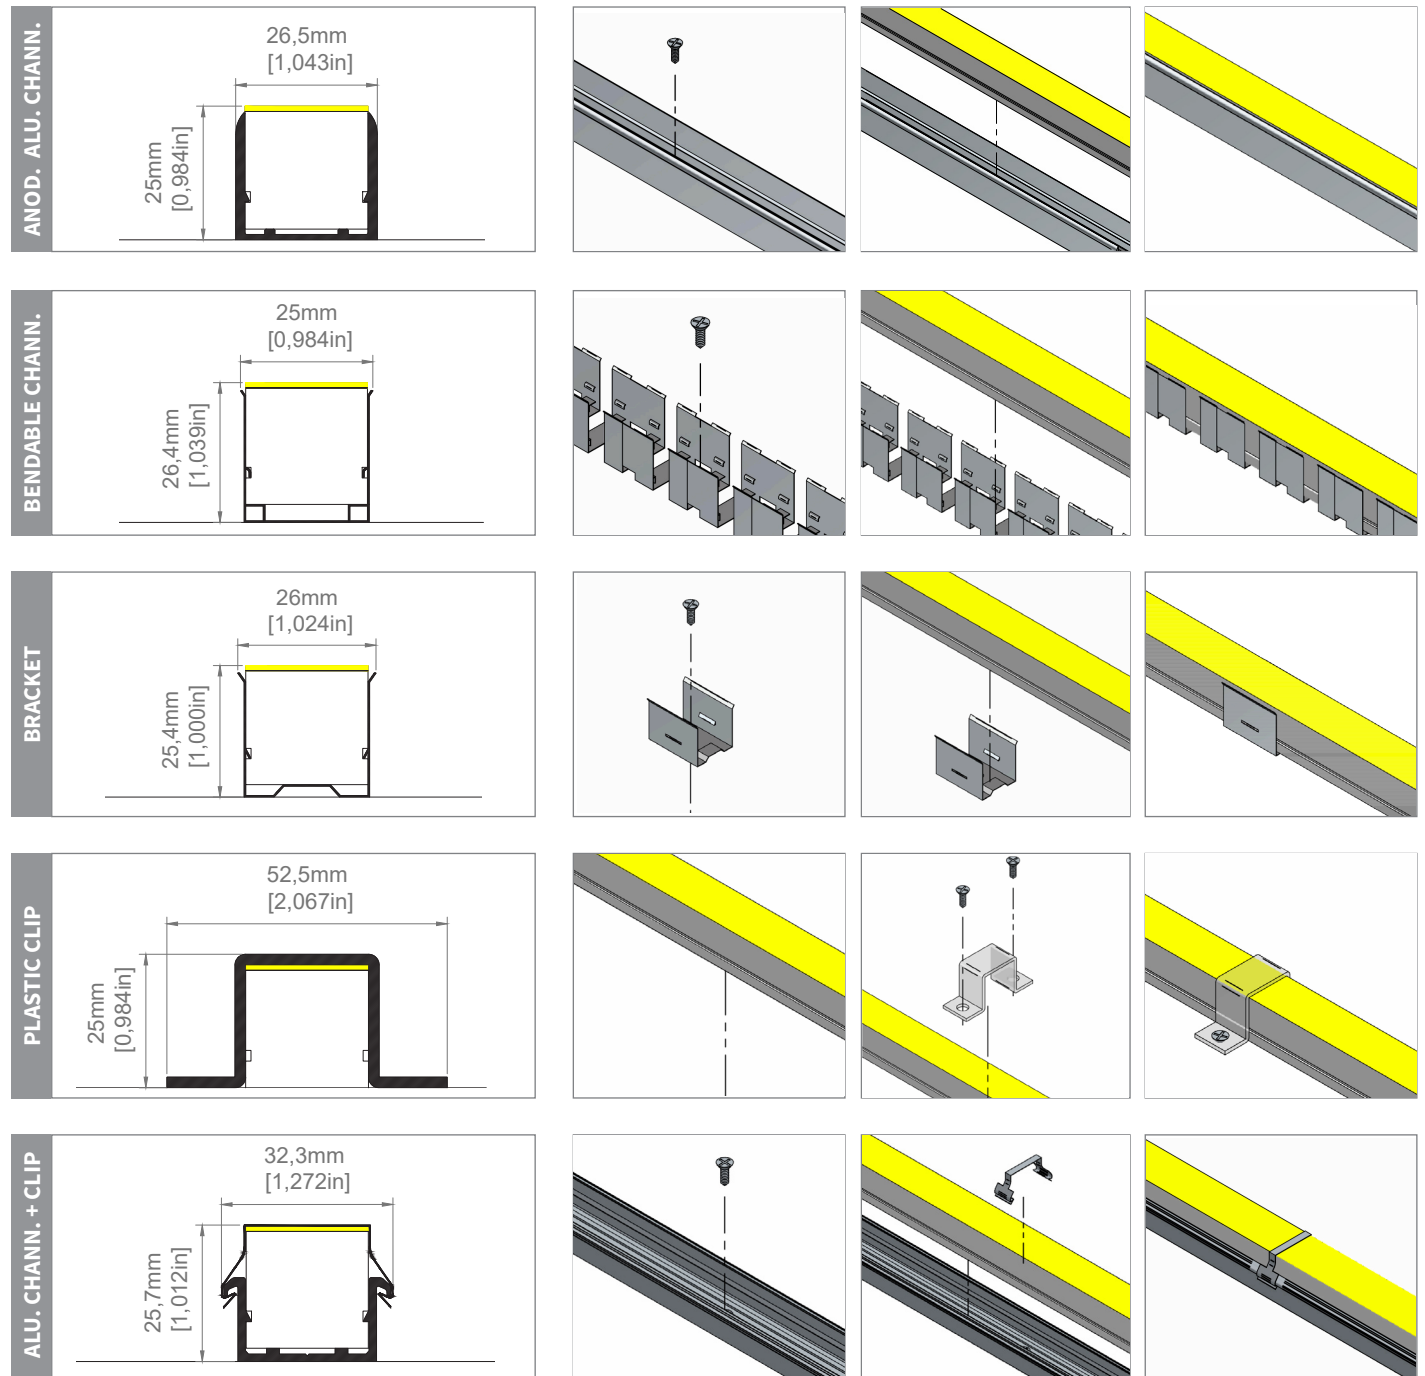

# LUXLED EVO OMNIA RGBW - [23x23mm [0,9x0,9in]]



## LIGHT DISTRIBUTION DIAGRAM

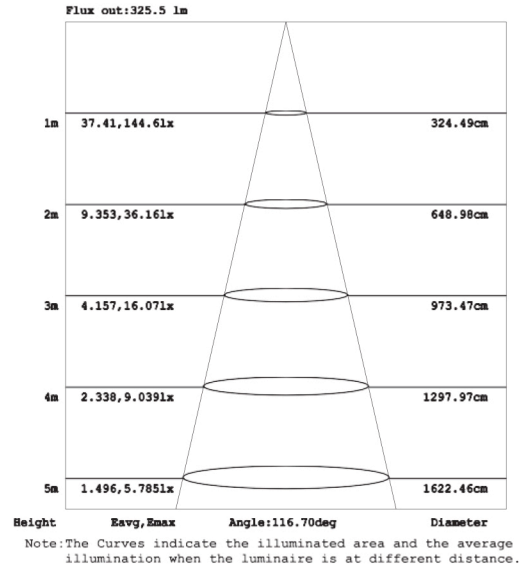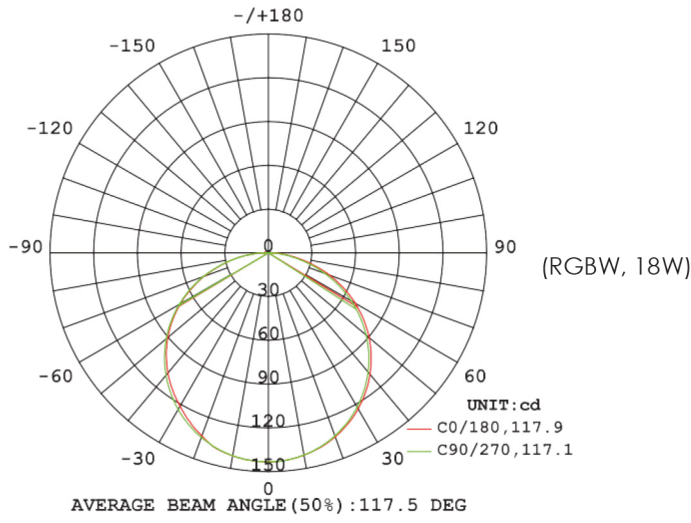

EVO OMNIA RGBW / 18W



# LUXYLED EVO OMNIA RGBW - [23x23mm [0,9x0,9in]]

## LUXYLED COLLECTION

	SIZE (Light output from W)	SIDE BEND	TOP BEND	ZERO <sup>*</sup> MODULES	12V	24V	WHITE	TUNABLE WHITE	DIM TO WARM	RGB	RGBW	IP67	LUMEN
LUXYLED EVO4 & 4FR	W4xH8,5mm W0,16xH0,33in	●	-	●	●	●	●	-	-	-	-	●	218 lm/m 66lm/ft (4000K)
LUXYLED EVO8.5	W8,5xH10mm W0,33xH0,39in	●	●	●	●	●	●	-	-	-	-	●	559 lm/m 170lm/ft (4000K)
LUXYLED EVO8.8	W8,8xH16,5mm W0,35xH0,65in	●	-	●	-	●	●	-	-	●	●	●	350 lm/m 110lm/ft (3000K)
LUXYLED EVO10 MULTIBENDING	W10xH10mm W0,39xH0,39in	●	●	●	-	●	●	-	-	-	-	●	450 lm/m 137lm/ft (4000K)
LUXYLED EVO13	W13xH13mm W0,5xH0,5in	-	●	●	-	●	●	-	-	●	-	●	830 lm/m 250lm/ft (3000K)
LUXYLED EVO19 TOP	W20xH20mm W0,79xH0,79in	-	●	-	-	●	●	●	●	●	●	●	650lm/m 198lm/ft (4000K)
LUXYLED EVO19 SIDE	W10xH20mm W0,39xH0,79in	●	-	●	-	●	●	●	●	●	●	●	535lm/m 160lm/ft (4000K)
LUXYLED EVO OMNIA	W16xH16mm W0,63xH0,63in	●	●	●	-	●	●	●	●	●	-	●	840lm/m 260lm/ft (4000K)
LUXYLED EVO OMNIA RGBW	W23xH23mm W0,9xH0,9in	●	●	-	-	-	-	-	-	-	●	●	498lm/m 152lm/ft (4000K)
LUXYLED EVO360	Ø 18mm Ø 0,71in	●	●	●	-	●	●	-	-	-	-	●	1150lm/m 350lm/ft (4000K)
LUXYLED EVO COBRA	W23xH23mm W0,9xH0,9in	●	●	-	-	●	●	●	-	-	-	●	1994lm/m 608lm/ft (4000K)
LUXYLED EVO COBRA RGB/RGBW	W34xH25mm W1,3xH0,98in	●	●	-	-	●	-	-	-	●	●	●	1186m/m 361lm/ft (4000K)

ZERO MODULE\* technology not available for RBG and RGBW

CHECK HERE LUXYLED APPLICATIONS



SCAN