VANILLA
LIGHT CREATING SPACE

VANILLA 1616 PROFILE

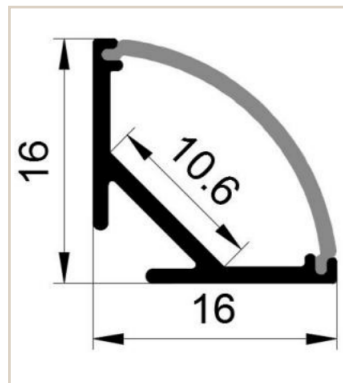ETL Intertek · c UL us LISTED E497000 · TÜV Rheinland CERTIFIED · UKCA · CE · RoHS compliant

1616 PROFILE

The Vanilla 1616 Profile is a curved 16mm x 16mm (0.62"x0.62") channel that facilitates our 6mm (0.24") to the 8mm (0.31") LED tape. The LED tape is Eco design certified and due to this opereates for longer with better energy efficiency. The profile and tape come together to create a modern and sleek look for any interior application.
IP20

PROFILE PERFORMANCE

MATERIAL:	ALUMINIUM
LENGTH:	8 FEET
RATING:	IP20 - DRY LOCATION
FINISH:	ALUMINIUM
LENS:	OPAL

KEY DIMENSIONS

LED PERFORMANCE

			Warm Dim
LED/M:	160LEDs/M	240LEDs/M	264LEDs/M
POWER:	3.05W/ft (10W/M)	5.48W/ft (18W/M)	5.48W/ft (18W/M)
LUMENS:	500 Lm/ft (1650 Lm/m)	931 Lm/ft (3054 Lm/m)	402 Lm/ft (1321 Lm/m)
VOLTAGE:	24V		
CRI:	90+		
IP LISTING:	IP20		
CCT:	2400K / 2700K / 3000K		1800K-3000K

ORDER INFORMATION

Order Code

MAKE	PROFILE	FINISHES		LENGTH	LENS		ACCESSORIES	
VAN	LPR-1616	AL	Aluminium	8'*	OP	Opal	EC	End Cap
				XX**			CLP	Clip

*8FT BULK-ORDER FIELD CUTTABLE
**PREASSEMBLED ON REQUEST

COMPATIBLE LED TAPE

Order Code

MAKE	TAPE	CCT
VAN	LPRT-3W	2400K
	LPRT-5.5W	2700K
		3000K
	LPRT-5.5W	1800K-3000K

LED TAPE DIMENSIONS

160 LEDs/M

240 LEDs/M

264 LEDs/M

LGN LIGHTING GROUP NETWORK

Imported by the Lighting Group Network (LGN).
https://www.lightinggroupnetwork.com

Lighting Group Network is the premier importer of European lighting products. We specialize in tailoring products from around the world to make them compliant with every North American market. From component sourcing, to full listings, Lighting Group Network has the engineering background to bring any manufacturer or product to full local compliance.

IP20
FOR INTERIOR USE ONLY.

Vanilla Lighting
Imported by the Lighting Group Network, LLC · Page 01/01 · Updated 10/04/24